




### Iron Grip® Bypass Mechanical Plug Features:

- Easy, tool-free installation
- For permanent or temporary use
- For use in water and air sewer testing
- Cast-iron design

### Equipped with:

- Large installation wing-nut
- Neoprene rubber o-ring

### Blocking Flow

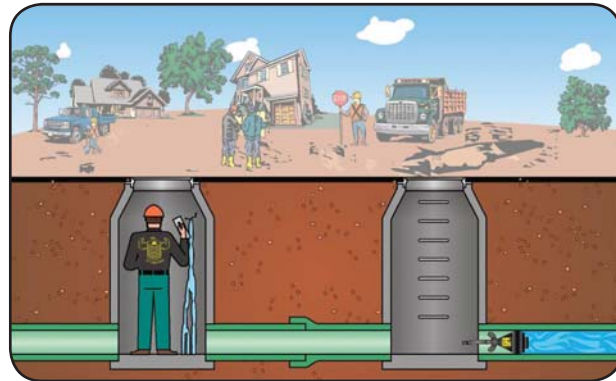

Part #	Nominal Size	Size Usage Range		Maximum Allowable Back Pressure		Product Specifications		
		Minimum Diameter	Maximum Diameter	Air Pressure PSI*	Head Pressure (Feet of Head)	Product Length	Product Weight	Bypass Diameter (M NPT)
<b>Iron Grip™ Bypass Plugs</b>								
268028	2" (50 mm)	1.94" (49 mm)	2.12" (54 mm)	13 (0,9 bar)	30 (9.1 M)	9.75" (248 mm)	.25 lbs (.6 kg)	3/8"
268038	3" (75 mm)	2.82" (72 mm)	3.12" (80 mm)	11 (0,76 bar)	25 (7.6 M)	12.75" (324 mm)	.50 lbs (1.1 kg)	1/2"
268048	4" (100 mm)	3.6" (92 mm)	4.06" (103 mm)	8.7 (0,61 bar)	20 (6.1 M)	12.75" (324 mm)	.7 lbs (1.5 kg)	1/2"
268068	6" (150 mm)	5.57" (142 mm)	6.12" (155 mm)	4.3 (0,30 bar)	10 (3 M)	12.75" (324 mm)	1.25 lbs (2.8 kg)	1/2"
268088	8" (200 mm)	7.72" (196 mm)	8.2" (208 mm)	4.3 (0,30 bar)	10 (3 M)	17" (432 mm)	2.7 lbs (5.9 kg)	1/2"
268108	10" (250 mm)	9.8" (249 mm)	10.2" (260 mm)	3.5 (0,24 bar)	8 (2.4 M)	17" (432 mm)	4 lbs (8.8 kg)	1/2"
268128	12" (300 mm)	11.56" (294 mm)	12.2" (310 mm)	2.6 (0,18 bar)	6 (1.8 M)	19.5" (500 mm)	6.4 lbs (14 kg)	1"

\* Always block plugs when conducting air tests!