



The Orca™ nozzle allows you to connect two jetter units and receive double the water flow.

ORCA™ Nozzle

To clean larger sewer pipes cost effectively there is a demand of higher flow nozzles. This is the reason why we have developed the Orca™ nozzle which allows you to connect two jetter units and receive double the water flow.

Characteristics & Construction:

- Quality stainless steel construction with conduits that allow turbulence free water transportation to the individual jet with SBR rubber conduit cover. This allows for a jet stream to be maintained longer and farther down the pipe.

- Variable jet sizes to accommodate flows from 60-400 US GPM.
- Low angle jet stream, attacks debris at its weakest point with superior performance.
- One swivel needed for mounting and operation.




NozzTeq™

Specifications	
Hose size	Two separate hoses (any standard size) are required
Flow rates	60-400 US GPM
Pipe size	15" and up
Jet sizes	1.9 mm to 6.0 mm
Sled sizes	One none adjustable
Weight does not include swivel	10 lbs
Length	18.5 "
Diameter	11.4"
No. of jets	8

Note: Weights and dimensions are approximate and subject to change without notice.

Art no.	Description
ORN01	The Orca™ package includes: eight (8) jets and one (1) stainless steel swivel. Standard connection 1 ¼" BSP female thread. Adjustable to your needs.

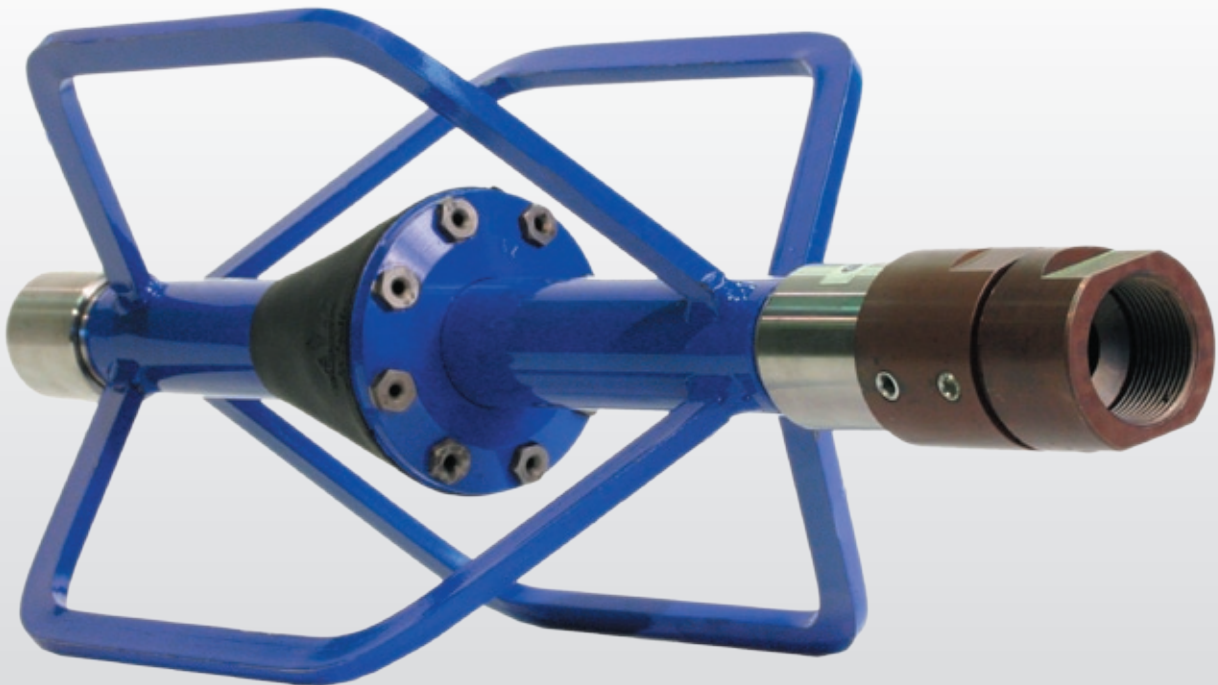

NozzTeq Inc. ADDRESS: 1497 Main Street #354 Dunedin, FL 34698

PHONE: 1-866-620-5915 FAX: 1-603-413-6744

EMAIL: info@nozzteq.com HOMEPAGE: www.nozzteq.com